

### CR8-PEDTURN TURNSTILE SERIES

Recognised as the most reliable industrial, aesthetically, robust advanced turnstiles with leading edge technology possible, The PEDTURN Series units can be engineered to meet all your security and pedestrian control requirements, and can be created as stand-alone units, or as part of an integrated system.

Available in stainless steel, powder coat or a hot dipped galvanized finish, these units can be fitted for any application and integrate with any access control system.

- 15 people per minute throughput
- 100% duty cycle rating on mechanism and 12VDC or 24VDC solenoids
- Controls housed in an 11 Pin plug in module and easily accessible
- Bi directional or single lane mode
- Stainless steel spindle/rotor with hot dip galvanised frame
- Rugged construction ensures trouble free performance and durability
- Optional back to back type dual lane
- Three rotor sections for 120degree of passage space allow for greater comfort in use still ensuring one person per transaction ideal for miners. construction workers with toolbox
- Access/intercom enclosure entry/exit paths



On power failure the following functions are available:

- a. Locked entry – free exit
- b. Locked exit – free entry
- c. Locked in both directions
- d. Free wheel in both directions

"2 Year unconditional guarantee on mechanism"

#### Options


1. Battery backup keeps turnstile operating for up to 4 hours
2. Buzzer to indicate card has been accepted
3. LED lane indicators
4. Overhead LED illumination

## Product Brochure

# Pedestrian Control-CR8-PEDTURN Turnstiles

### Specifications:

<b>Mechanism:</b>	Mechanical pawl and rollers non-reversible after 33°
<b>Solenoid</b>	12V DC
<b>Current:</b>	5 AMPS
<b>Duty Cycle:</b>	100%
<b>Height:</b>	2229 mm
<b>Width:</b>	1350 mm
<b>Depth:</b>	1310 mm

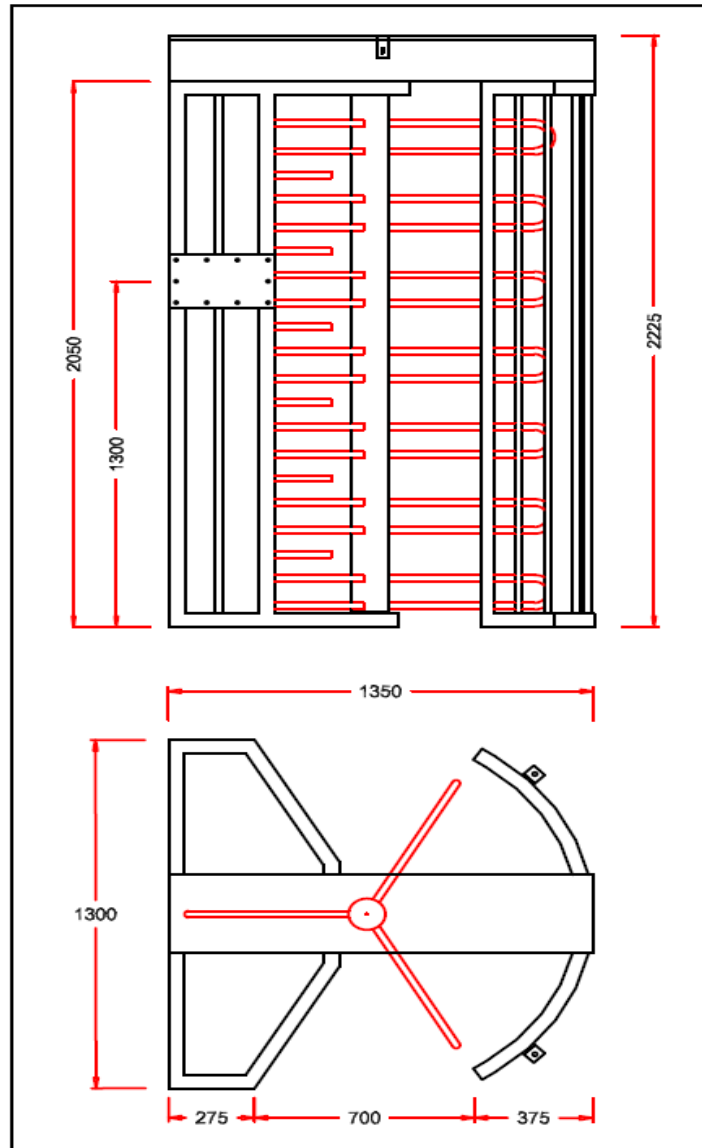

For more information about this product or to arrange a practical demonstration of our range of Automation products contact:  
[sales@createsecurity.com.au](mailto:sales@createsecurity.com.au)

Ph 07 3390 5050